

(19) World Intellectual Property Organization  
International Bureau



(43) International Publication Date  
29 November 2001 (29.11.2001)

PCT

(10) International Publication Number  
**WO 01/89400 A2**

(51) International Patent Classification?: **A61B 17/70**

(21) International Application Number: **PCT/CA01/00751**

(22) International Filing Date: **25 May 2001 (25.05.2001)**

(25) Filing Language: **English**

(26) Publication Language: **English**

(30) Priority Data:  
60/206,811 **25 May 2000 (25.05.2000) US**

(71) Applicant (for MG only): **SOFIA, Michel [CA/CA]; c/o Swabey Ogilvy Renault, 1981 McGill College Avenue, Suite 1600, Montreal, Quebec H3A 2Y3 (CA).**

(71) Applicant and

(72) Inventor (for all designated States except MG):  
**SEVRAIN, Lionel, C. [FR/US]; 5 Hilldale Road, Plymouth, MA 02360 (US).**


(74) Agents: **SOFIA, Michel et al.; Swabey Ogilvy Renault, Suite 1600, 1981 McGill College Avenue, Montreal, Quebec H3A 2Y3 (CA).**

(81) Designated States (national): **AE, AG, AI, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZW.**

(84) Designated States (regional): **ARIPO patent (GI, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).**

[Continued on next page]

(54) Title: **ANCHORING SYSTEM FOR FIXING OBJECTS TO BONES**

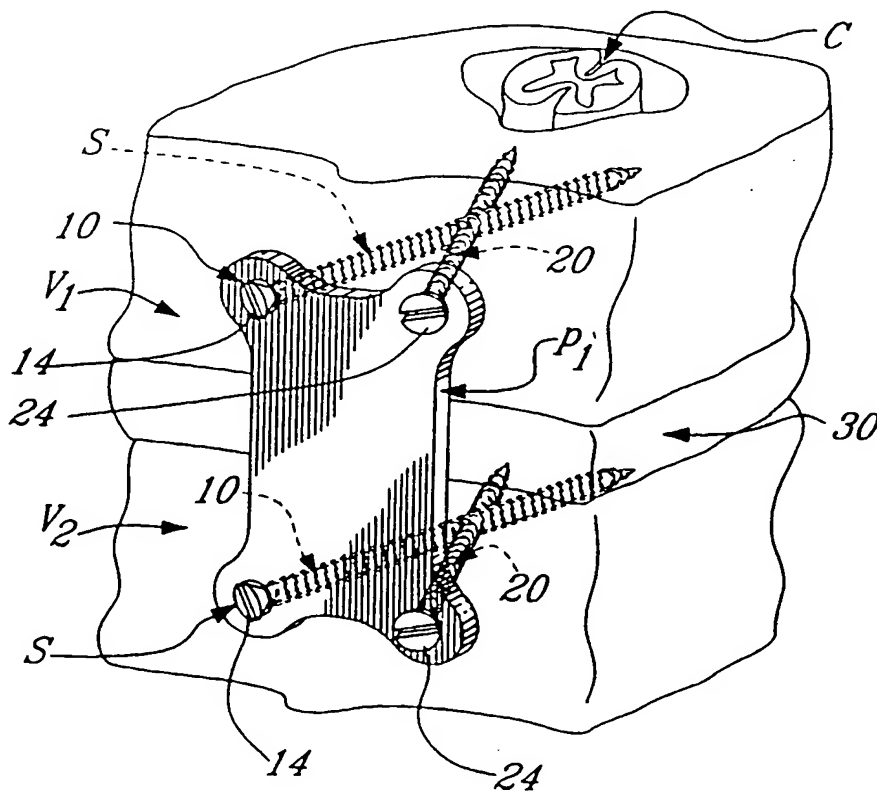

(57) Abstract: An anchoring system (S) for mounting a support plate (P, P') for instance to a human rachis comprises first and second threaded fasteners (10, 20) each having proximal and distal ends. The proximal ends are adapted to be spaced from each other for holding the support plate (P, P') against a vertebra (V, V<sub>1</sub>, V<sub>2</sub>) of the rachis while the distal ends are embedded in the bone. The threaded fasteners (10, 20) converge from their proximal ends towards their distal ends. The first threaded fastener (10) defines at its distal end a female threaded opening (12) extending obliquely means of the first fastener (10) and adapted to be threadably engaged by the male threaded distal end of the second fastener (20). The proximal end of the first fastener (10) is provided with indicia for indicating an orientation of its threaded opening (12) within the bone (V, V<sub>1</sub>, V<sub>2</sub>) such as to facilitate the engagement therein of the male threaded distal end of the second fastener (20). With the support plate (P, P'), the first and

second fasteners (10, 20) define a triangular frame that is firmly secure to the vertebra (V, V<sub>1</sub>, V<sub>2</sub>).

**BEST AVAILABLE COPY**

**WO 01/89400 A2**



**Published:**

-- without international search report and to be republished  
upon receipt of that report

*For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*

## ANCHORING SYSTEM FOR FIXING OBJECTS TO BONES

BACKGROUND OF THE INVENTION(a) Field of the Invention

The present invention relates to devices for attaching various objects, such as prostheses or implants, to bones, including for anchoring spinal instrumentations to vertebrae of the human rachis.

(b) Description of Prior Art

U.S. Patents No. 5,366,455 issued to Dove et al. on November 22, 1994, No. 5,672,175 issued to Martin on September 30, 1997, No. 5,733,284 issued to Martin on March 31, 1998 and No. 5,437,672 issued to Alleyne on August 1, 1995 disclose devices for anchoring various supports, e.g. spinal orthoses, to the rachis, these devices being adapted to obviously extend outwardly of the spinous process or canal and thus of the spinal cord.

U.S. Patents No. 5,800,433 issued to Benzel et al. on September 1, 1998 and No. 5,954,722 issued to Bono on September 21, 1999 teach anchoring systems having screws which are angled such as to converge towards each other.

U.S. Patents No. 5,904,683 issued to Pohndorf et al. on May 18, 1999 and No. 5,980,523 issued to Jackson on November 9, 1999 disclose anterior cervical vertebral stabilising devices held in place by various types of screws.

To try preventing the screws from loosening, various systems have been used, such as directing the screws along different orientations (e.g. diverging or converging); providing a locking mechanism on the screw (e.g. counter-nut); modifying the screw's thread (height and depth); engaging each screw to two tissues having different densities; etc.

SUMMARY OF THE INVENTION

It is therefore an aim of the present invention to provide a novel anchoring system for securing various objects to bones, such as spinal devices or instrumentations to the rachis.

It is also an aim of the present invention to provide an anchoring system well adapted to prevent a loosening thereof over time.

Therefore, in accordance with the present invention, there is provided an anchoring system for mounting an object to a bone, comprising first and second anchoring members each having proximal and distal ends, said proximal ends being adapted to hold the object to the bone while said distal ends are in the bone, said proximal ends being spaced from each other with said first and second anchoring members converging from said proximal ends towards said distal ends, said distal ends being adapted to be connected to each other in the bone.

More specifically, a support member, such as a plate (cervical spine) or rods (thoraco-lumbar spine) or any other binding means (bone), is also provided, said proximal ends of said first and second anchoring members being adapted to hold said support member to the bone while said distal ends are connected to each other in the bone thereby forming a triangular frame.

Also in accordance with the present invention, there is provided a triangular frame for mounting to a bone, comprising a support member, and first and second anchoring members each having proximal and distal ends, said proximal ends being adapted to hold said support member to the bone while said distal ends are in the bone, said proximal ends being spaced from each other with said distal ends being adapted to be connected to each other in the bone.

Further in accordance with the present invention, there is provided a method for mounting an

object to a bone, comprising the steps of: (a) providing first and second anchoring members each having proximal and distal ends, (b) introducing said first and second anchoring members in the bone with said proximal ends being spaced from each other and such that said first and second anchoring members converge from said proximal ends towards said distal ends, and (c) connecting said distal ends to each other in the bone, wherein said proximal ends hold the object to the bone.

Still further in accordance with the present invention, there is provided a method for mounting an object to a structure, comprising the steps of: (a) providing first and second anchoring members each having proximal and distal ends, (b) introducing said first and second anchoring members in the structure with said proximal ends being spaced from each other and such that said first and second anchoring members converge from said proximal ends towards said distal ends, and (c) connecting said distal ends to each other in the structure, wherein said proximal ends hold the object to the structure.

#### BRIEF DESCRIPTION OF THE DRAWINGS

Having thus generally described the nature of the invention, reference will now be made to the accompanying drawings, showing by way of illustration a preferred embodiment thereof, and in which:

Fig. 1 is a schematic cross-sectional plan view of a bridging plate mounted to a lumbar vertebra using an anchoring system in accordance with the present invention; and

Fig. 2 is a schematic anterior perspective view of a bridging plate mounted to a pair of cervical vertebra using the anchoring system in accordance with the present invention.

DESCRIPTION OF THE PREFERRED EMBODIMENTS

Fig. 1 illustrates an anchoring system S in accordance with the present invention which is herein schematically shown in an engaged position to a lumbar vertebra V of the human rachis for holding firmly thereagainst a spinal prosthesis or spinal instrumentation, such as a support plate P, from a posterior approach.

Fig. 2 illustrates two anchoring systems S that hold an object, such as a cervical plate P' that has been positioned after classical anterior or antero-lateral approach of the cervical spine and that is herein used to link together two or more adjacent vertebrae, such as vertebrae V<sub>1</sub> and V<sub>2</sub>. For instance, when a cervical disk is anteriorly removed (see 30 in Fig. 2) from between two adjacent vertebrae, it is known to fuse both these vertebrae together to provide stability to the rachis. This can be done by securing plates to the vertebrae. To replace the disks, a spinal prosthesis may be installed and such a prosthesis typically comprises a pair of upper and lower plates secured with screws respectively to the upper and lower vertebrae between which the disk has been removed with a prosthetic disk being provided between these vertebrae and which is held in place by the plates. U.S. Patents No. 5,258,031 issued to Salib et al. on November 2, 1993 and No. 6,001,130 issued to Bryan et al. on December 14, 1999 disclose known examples of intervertebral disk prostheses which are secured to adjacent vertebrae using screws which extend therein. In these cases, one screw is used to mount each of the upper and lower support assemblies to its respective vertebra. On the other hand, U.S. Patent No. 5,755,796 issued to Ibo et al. on May 26, 1998 teaches a cervical disk prosthesis wherein each of the upper and lower plates are secured to its respective vertebra by way of a pair of screws which are horizontally spaced apart from each other. The prosthesis is secured anteriorly of the rachis

and the screws thereof are short enough not to reach the spinal cord.

In other cases however (posterior approach), the screws are longer and are generally directed on each side of the spinous canal in order to obviously prevent damage to the spinal cord.

Therefore, the present anchoring system S (for each of Figs. 1 and 2) comprises first and second screws 10 and 12, respectively, which are adapted to be introduced in the vertebra at an angle and convergingly towards each other, as seen in Fig. 1. In the illustrated embodiment, the first screw 10 is larger than the second screw 20 and defines near its distal end an oblique threaded through opening 12. The two screws 10 and 20 have flat head 14 and 24 which define a depression which is shaped to be engageable by a screwdriver, or the like, for inducing torque thereto and causing the screws 10 and 20 to rotatably engage the vertebra V and gradually advance translationally thereinto, in a conventional manner. In Fig. 1, these depressions are slots 16 and 26 for use with a flat blade screwdriver, although the depressions could be cruciform, square, hexagonal, torx, etc., shaped.

The second screw 20 has a threaded stem of which at least a distal section is smaller than that of the first screw 10 as the second screw 20 is adapted to extend through the opening 12 of the first screw 10 such as to threadably engage the same. Indeed, the male threads of the second screw 20 are designed to engage the female threads of the opening 12 of the first screw 10 thereby securing together the distal ends of the two screws 10 and 20. With these distal ends so engaged and with the screws 10 and 20 extending in a convergent attitude, there is resistance, where the two screws 10 and 20 are engaged together, to the forces which tend to cause the screws to gradually loosen, whereby it is virtually impossible for the screws 10 and 20 to loosen

(unless the vertebra V itself is destructed where it is engaged by the screws 10 and 20, or unless one of the screws 10 and 20 breaks).

In fact, the first screw 10 acts as a nut for the second screw 20, and this within the vertebra V itself in Figs. 1 and 2 (as opposed to conventional nuts which normally engage the screw or bolt on the outside of the object through which the screw or bolt extends).

The first screw 10 is preferably provided at its head 14 with indicia (colour, index, etc.) to indicate the position of its distal end so that the position or orientation of its threaded opening 12 can be more easily determined thereby facilitating the introduction of the second screw 20 therethrough. An aiming system may be used as a guide during the screwing process. For instance, to ensure an accurate aiming of the two screws 10 and 20 and their relative engagement, a template may be used to guide both screws from an initial predetermined spacing, along a given plane and along predetermined angles. Alternatively, a neuro-navigation apparatus can also be used, that is a computer software capable of transposing digitised data taken from a pre-surgery medical imagery of the stereotactic space in which the surgeon will operate.

The obliqueness of the threaded opening 12 through the first screw 10 depends on the angle, that is on the spacing on the plate P/P' between the two screws 10 and 20 (i.e. generally the spacing between their heads 14 and 24) in a horizontal plane, as well as the directions of the screws 10 and 20 in the sagittal plane.

The two screws 10 and 20 extend in holes defined in the plate P/P', and would normally have their heads 14 and 24 in abutment with the proximal surface of the plate P/P' (as in Fig. 2, but as opposed to the schematic illustration of Fig. 1 where the heads 14 and 24 are shown spaced from the plate P but simply for illustration purposes). The holes in the plate P/P' are



typically angled so as to ensure the crossing of the screws 10 and 20 at a precise location in the vertebra V and so permit the threaded engagement of the second screw 20 in the opening 12 of the first screw 10 once the first screw 10 is completely fixed (i.e. screwed in the vertebra V) and once the position of its opening 12 is determined by way of the indicia on its head 14.

The two screws 10 and 20 and the plate P/P' define a triangular frame (which is well shown in Fig. 1) which is rigid, closed and locked in place, having its components locked together in a solid medium, i.e. the vertebra V, whereby expulsion of the screws 10 and 20 from the vertebra V is opposed. Each of the three components 10, 20 and P/P' of this frame is integral to the preceding component and to the next component. The triangulation screwing process is a concept based on the principle that a frame is much stronger than an open structure. By connecting two screws at their distal ends, it becomes possible to create such a frame. This triangular configuration is also convenient as it allows the anchoring system S, in addition to firmly securing the plate P/P' to the vertebrae V, V<sub>1</sub> and V<sub>2</sub> and preventing a loosening of the plate P/P' with respect to these vertebrae, to extend around the spinal process or canal C and thus around the spinal cord when the plate P/P' is, for instance, installed posteriorly (see Fig. 1).

In the case of the use of the anchoring system S to install the plate P' onto the adjacent vertebrae V<sub>1</sub> and V<sub>2</sub> of the cervical rachis (Fig. 2), along an antero-lateral path, for instance following the removal of an herniated disc, osteosynthesis can be realised by fixing a plate P' (e.g. a "Senegas"-type plate) with anchoring two systems S, as in Fig. 2. The plate P' is centered about the intersomatic space 30, which is devoid of its natural disc, the latter having been replaced by a disc prosthesis. The first screws 10 are then positioned in

the left holes 14 of the plate P', along an antero-posterior axis or slightly obliquely from the left to the right, as the screwdriver will be hindered by the thickness of the oseo-tracheal axis (displaced to the left), before the first screws 10 are screwed through the left holes 14 and into the vertebrae V<sub>1</sub> and V<sub>2</sub>. Once the first screws are completely set into the vertebrae V<sub>1</sub> and V<sub>2</sub>, and properly positioned using their indicia, the two second screws 20 can be screwed through the right holes 14 of the plate P' and into the vertebrae V<sub>1</sub> and V<sub>2</sub>, which is easier than for the first screws 10 as the second screws 20 can be more easily inclined from right to left as the jugulo-carotid bundle is not as obstructive. A scopic control can ensure the proper engagement of the two screws 10 and 20 of each anchoring system S.

In the case of the plate P of Fig. 1 secured posteriorly at least to the vertebra V with the anchoring system S, the determination of the entry points in each of the pedicles of the vertebra V can be realised according to Roy-Camille. The plate P, or a linking rod, is then positioned horizontally and transversely such that its holes are opposite the pre-determined entry points. The screws 10 and 20 are then installed as above to form with the aforementioned triangular frame. This triangular frame, which is rigid and intra-vertebral, can then be solidified to upper and lower frames using plates or rods, in a conventional manner.

In order to facilitate the engagement of the second screw 20 into the first screw 10, the opening 12 in the first screw 10 may, instead of being threaded, have the form of a spherical socket that rotatably accommodates a ball. A hole extends, typically diametrically, through this ball and defines an interior thread, that is a female thread that can be screwably engaged by the male thread of the second screw 20. Therefore, the ball could rotate within the socket to allow for a correction in the direction of the second

screw 20 relative to the first screw 10; in other words, if the second screw 20 is slightly off target in its orientation with respect to the hole defined in the ball of the first screw 10, the ball may be slightly rotated to align the longitudinal axis of its hole with the axis of the second screw 20.

It is also contemplated to provide a threadless opening in the first screw 10 instead of the threaded opening 12; in such a case, the opening would be self-tapping in that the male threads of the second screw 20 would tap a thread in the opening of the first screw 10 upon rotary engagement therein. Similarly, the above-mentioned ball could also be threadless and self-tapping. Furthermore, the first screw 10 could be replaced by a threadless pin or nail that would be translationally insertable in the bone and that would define an opening (threaded or self-tapping) at its distal end for receiving the second screw 20.

It is further contemplated to use elongated anchoring members other than the above-described and herein illustrated screws 10 and 20, as well as other means of securing the distal ends of such anchoring members together. For instance, the screws 10 and 20 could be replaced by threadless pins or nails that would be translationally inserted in the bone. In such a case, the distal end of a first one of the anchoring members could define an opening, such as an elongated slot, through which the distal end (which would, for instance, be flat) of a second one of anchoring members could be inserted. A locking mechanism between the two distal ends could take the form of a lateral pin extending from the distal end of the second anchoring member which, after having been passed beyond the elongated slot in the first anchoring member, would be rotated  $\frac{1}{2}$  turn such as to extend behind the body of the first anchoring member thereby locking the distal ends together. Such a pin could be embodied in the distal end of the second

anchoring member being L-shaped or T-shaped or defining a barb-shaped extension.

The common feature is two elongated members insertable in the bone and having distal ends capable of being interlocked for preventing unwanted withdrawal of any of the two elongated members from the bone.

Although the present anchoring system S has been shown herein in use to secure a plate P/P' to one or more lumbar (Fig. 1) or cervical (Fig. 2) vertebrae, the system S can also be used to secure rods instead of plates, for instance to the dorso-lumbar rachis, and in fact can be used to affix various objects to various bones of the body, and not only to the rachis. The system S can thus be used not only as described above and herein illustrated, but also in orthopaedic, in neuro-surgical, otorhinolaryngological, maxillo-facial and stomatological applications.

Every component of the anchoring system S is made of a biocompatible material or of a material capable of being so coated.

## I CLAIM:

1. An anchoring system for mounting an object to a bone, comprising first and second anchoring members each having proximal and distal ends, said proximal ends being adapted to hold the object to the bone while said distal ends are in the bone, said proximal ends being spaced from each other with said first and second anchoring members converging from said proximal ends towards said distal ends, said distal ends being adapted to be connected to each other in the bone.
2. An anchoring system as defined in claim 1, wherein said distal ends define co-operating engagement means for connecting said distal ends together in the bone.
3. An anchoring system as defined in claim 2, wherein said co-operating engagement means comprise inter-engageable male threaded means and female threaded means provided respectively on said distal ends of said second and first anchoring members.
4. An anchoring system as defined in claim 3, wherein said male threaded means comprise a threaded section provided at said distal end of said second anchoring member, and wherein said female threaded means comprise a threaded opening obliquely defined at said distal end of said first anchoring member, said threaded section being adapted to threadably engage said threaded opening.
5. An anchoring system as defined in claim 4, wherein said first and second anchoring members comprise respectively first and second screws, said first screw defining said threaded opening.
6. An anchoring system as defined in claim 3, wherein said proximal end of said first anchoring member is

provided with indicia means for indicating an orientation of said female threaded means in the bone thereby facilitating the engagement therein of said male threaded means of said second anchoring member.

7. An anchoring system as defined in claim 6, wherein said proximal ends of each of said first and second anchoring members are provided with a head engageable by a torque-producing tool for engaging said first and second anchoring members in the bone, said indicia means being at least provided on said head of said first anchoring member.
8. An anchoring system as defined in claim 3, wherein said male threaded means comprise a threaded section provided at said distal end of said second anchoring member, and wherein said female threaded means comprise a threaded opening defined through a ball rotatably mounted in a socket defined at said distal end of said first anchoring member, said threaded section being adapted to threadably engage said threaded opening.
9. An anchoring system as defined in claim 1, further comprising a support member, said proximal ends of said first and second anchoring members being adapted to hold said support member to the bone while said distal ends are connected to each other in the bone thereby forming a triangular frame.
10. An anchoring system as defined in claim 9, wherein said support member defines a pair of holes, said first and second anchoring members being adapted to extend through said holes with said proximal ends engaging said support member adjacent said holes.
11. An anchoring system as defined in claim 10, wherein said first and second anchoring members converge from

said proximal ends towards said distal ends, said distal ends defining co-operating engagement means for connecting said distal ends together in the bone.

12. An anchoring system as defined in claim 11, wherein said co-operating engagement means comprise inter-engageable male threaded means and female threaded means provided respectively on said distal ends of said second and first anchoring members.

13. An anchoring system as defined in claim 12, wherein said male threaded means comprise a threaded section provided at said distal end of said second anchoring member, and wherein said female threaded means comprise a threaded opening obliquely defined at said distal end of said first anchoring member, said threaded section being adapted to threadably engage said threaded opening.

14. An anchoring system as defined in claim 13, wherein said first and second anchoring members comprise respectively first and second screws, said first screw defining said threaded opening.

15. An anchoring system as defined in claim 12, wherein said proximal end of said first anchoring member is provided with indicia means for indicating an orientation of said female threaded means in the bone thereby facilitating the engagement therein of said male threaded means of said second anchoring member.

16. A triangular frame for mounting to a bone, comprising a support member, and first and second anchoring members each having proximal and distal ends, said proximal ends being adapted to hold said support member to the bone while said distal ends are in the bone, said proximal ends being spaced from each other with said distal ends being adapted to be connected to each other in the bone.

17. A triangular frame as defined in claim 16, wherein said first and second anchoring members converge from said proximal ends towards said distal ends, said distal ends defining co-operating engagement means for connecting said distal ends together in the bone.
18. A triangular frame as defined in claim 17, wherein said co-operating engagement means comprise inter-engageable male threaded means and female threaded means provided respectively on said distal ends of said second and first anchoring members.
19. A triangular frame as defined in claim 18, wherein said male threaded means comprise a threaded section provided at said distal end of said second anchoring member, and wherein said female threaded means comprise a threaded opening obliquely defined at said distal end of said first anchoring member, said threaded section being adapted to threadably engage said threaded opening.
20. A triangular frame as defined in claim 19, wherein said first and second anchoring members comprise respectively first and second screws, said first screw defining said threaded opening.
21. A triangular frame as defined in claim 18, wherein said proximal end of said first anchoring member is provided with indicia means for indicating an orientation of said female threaded means in the bone thereby facilitating the engagement therein of said male threaded means of said second anchoring member.
22. A triangular frame as defined in claim 16, wherein said support member defines a pair of holes, said first and second anchoring members being adapted to extend



through said holes with said proximal ends engaging said support member adjacent said holes.

23. A triangular frame as defined in claim 18, wherein said male threaded means comprise a threaded section provided at said distal end of said second anchoring member, and wherein said female threaded means comprise a threaded opening defined through a ball rotatably mounted in a socket defined at said distal end of said first anchoring member, said threaded section being adapted to threadably engage said threaded opening.
24. A method for mounting an object to a bone, comprising the steps of: (a) providing first and second anchoring members each having proximal and distal ends, (b) introducing said first and second anchoring members in the bone with said proximal ends being spaced from each other and such that said first and second anchoring members converge from said proximal ends towards said distal ends, and (c) connecting said distal ends to each other in the bone, wherein said proximal ends hold the object to the bone.
25. A method as defined in claim 24, wherein said first and second anchoring members comprise first and second threaded fasteners extending through respective holes defined in said object, said first threaded fastener defining at a distal end thereof a threaded opening adapted to threadably receive said distal end of said second fastener in step (c).
26. A method as defined in claim 25, wherein in step (b), said first anchoring member is completely installed in the bone before said second anchoring member is engaged in said threaded opening.

27. A method as defined in claim 26, wherein said first anchoring member is provided with indicia means at said proximal end thereof, and wherein before step (c), said threaded opening is properly positioned by way of said indicia means for receiving said distal end of said first anchoring member.
28. A method for mounting an object to a structure, comprising the steps of: (a) providing first and second anchoring members each having proximal and distal ends, (b) introducing said first and second anchoring members in the structure with said proximal ends being spaced from each other and such that said first and second anchoring members converge from said proximal ends towards said distal ends, and (c) connecting said distal ends to each other in the structure, wherein said proximal ends hold the object to the structure.
29. A method as defined in claim 28, wherein said first and second anchoring members comprise first and second threaded fasteners extending through respective holes defined in said object, said first threaded fastener defining at a distal end thereof a threaded opening adapted to threadably receive said distal end of said second fastener in step (c).
30. A method as defined in claim 29, wherein in step (b), said first anchoring member is completely installed in the structure before said second anchoring member is engaged in said threaded opening.
31. A method as defined in claim 30, wherein said first anchoring member is provided with indicia means at said proximal end thereof, and wherein before step (c), said threaded opening is properly positioned by way of said indicia means for receiving said distal end of said first anchoring member.

32. The use of an anchoring system for mounting an object to a bone, said anchoring system comprising first and second anchoring members each having proximal and distal ends, said proximal ends being adapted to hold the object to the bone while said distal ends are in the bone, said proximal ends being spaced from each other with said first and second anchoring members converging from said proximal ends towards said distal ends, said distal ends being adapted to be connected to each other in the bone.
33. The use of an anchoring system as defined in claim 32, wherein said distal ends define co-operating engagement means for connecting said distal ends together in the bone.
34. The use of an anchoring system as defined in claim 33, wherein said co-operating engagement means comprise inter-engageable male threaded means and female threaded means provided respectively on said distal ends of said second and first anchoring members.
35. The use of an anchoring system as defined in claim 34, wherein said male threaded means comprise a threaded section provided at said distal end of said second anchoring member, and wherein said female threaded means comprise a threaded opening obliquely defined at said distal end of said first anchoring member, said threaded section being adapted to threadably engage said threaded opening.
36. The use of an anchoring system as defined in claim 35, wherein said first and second anchoring members comprise respectively first and second screws, said first screw defining said threaded opening.

37. The use of an anchoring system as defined in claim 34, wherein said proximal end of said first anchoring member is provided with indicia means for indicating an orientation of said female threaded means in the bone thereby facilitating the engagement therein of said male threaded means of said second anchoring member.

38. The use of an anchoring system as defined in claim 37, wherein said proximal ends of each of said first and second anchoring members are provided with a head engageable by a torque-producing tool for engaging said first and second anchoring members in the bone, said indicia means being at least provided on said head of said first anchoring member.

39. The use of an anchoring system as defined in claim 34, wherein said male threaded means comprise a threaded section provided at said distal end of said second anchoring member, and wherein said female threaded means comprise a threaded opening defined through a ball rotatably mounted in a socket defined at said distal end of said first anchoring member, said threaded section being adapted to threadably engage said threaded opening.

40. The use of an anchoring system as defined in claim 32, wherein a support member is provided, said proximal ends of said first and second anchoring members being adapted to hold said support member to the bone while said distal ends are connected to each other in the bone thereby forming a triangular frame.

41. The use of an anchoring system as defined in claim 40, wherein said support member defines a pair of holes, said first and second anchoring members being adapted to extend through said holes with said proximal ends engaging said support member adjacent said holes.

42. An anchoring system as defined in claim 2, wherein said co-operating engagement means comprise inter-engageable male and female means provided respectively on said distal ends of said second and first anchoring members.

43. An anchoring system as defined in claim 42, wherein said female means comprise an elongated slot and said male means include a lateral extension at said distal end of said second anchoring member, said distal end and said lateral extension of said second anchoring member being insertable through said slot, wherein upon adequate rotation of said distal end of said second anchoring member, said lateral extension becomes locked behind said distal end of said first anchoring member.

44. An anchoring system as defined in claim 43, wherein said distal end of said second anchoring member and said lateral extension are one of T-shaped, L-shaped and barb-shaped.



45. An anchoring system as defined in claim 43, wherein said first and second anchoring members are threadless pins or nails.

46. An anchoring system as defined in claim 2, wherein said co-operating engagement means comprise a male threaded means at said distal end of said second anchoring member and an opening in said distal end of said first anchoring member adapted to be tapped by said male threaded means upon rotary engagement of said male threaded means in said opening.

47. An anchoring system as defined in claim 46, wherein said male threaded means comprise a threaded section provided at said distal end of said second anchoring member, and wherein said opening is defined in a ball

rotatably mounted in a socket defined at said distal end of said first anchoring member.

1/1

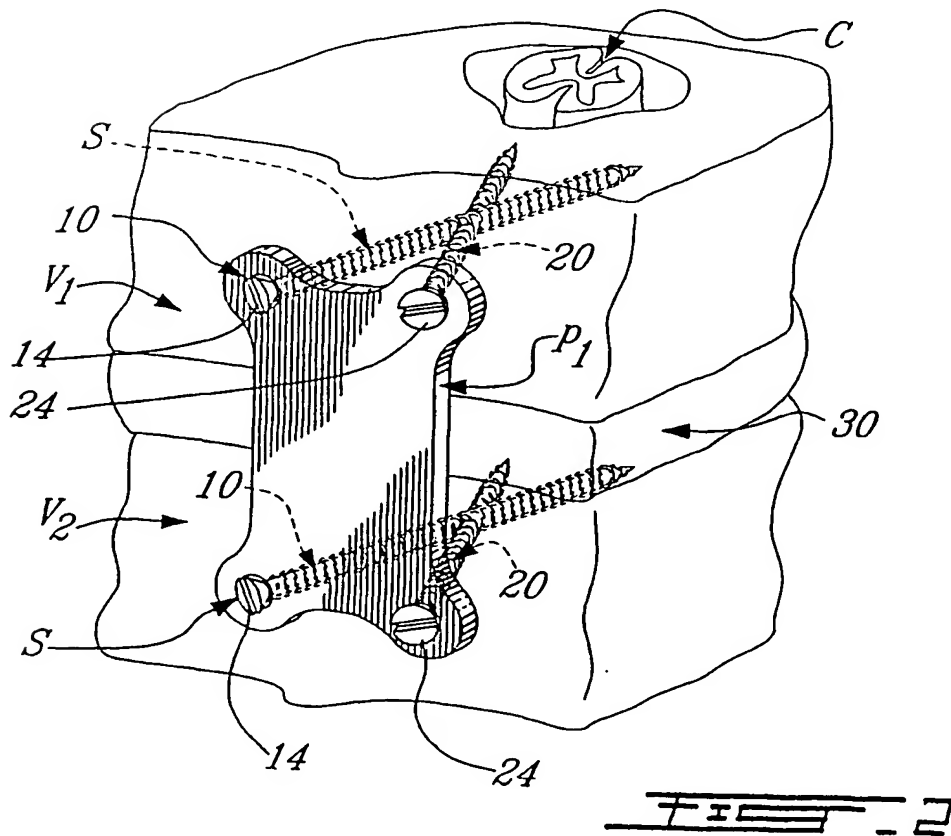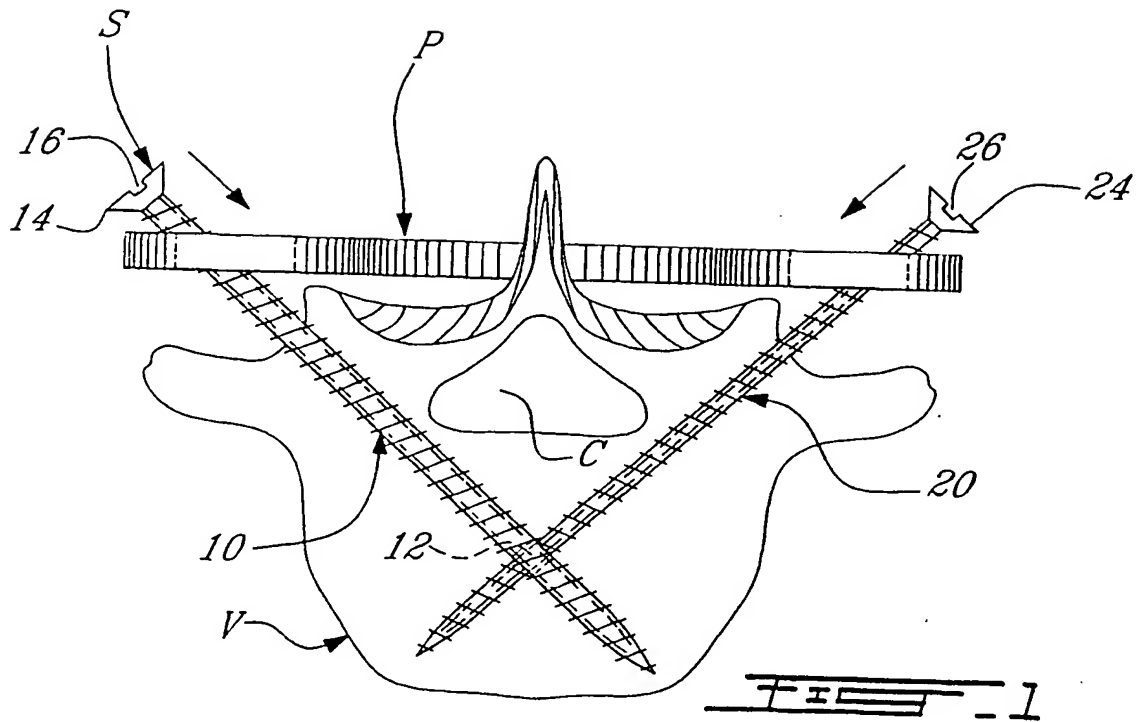

SUBSTITUTE SHEET (RULE 26)

(19) World Intellectual Property Organization  
International Bureau



(43) International Publication Date  
29 November 2001 (29.11.2001)

PCT

(10) International Publication Number  
**WO 01/089400 A3**

(51) International Patent Classification: **A61B 17/70**,  
17/86

(74) Agent: **BESSE, François**; c/o Andre Roland IPS, Avenue  
Tissot 15, Case Postale 1255, CH-1001 Lausanne (CH).

(21) International Application Number: **PCT/CA01/00751**

(81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZW.

(22) International Filing Date: **25 May 2001 (25.05.2001)**

(25) Filing Language: **English**

(26) Publication Language: **English**

(30) Priority Data:  
60/206,811 **25 May 2000 (25.05.2000)** **US**

(84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).

(71) Applicant (*for MG only*): **SOFIA, Michel** [CA/CA]; c/o  
Swabey Ogilvy Renault, 1981 McGill College Avenue,  
Suite 1600, Montreal, Quebec H3A 2Y3 (CA).

Published:

— with international search report


(71) Applicant and

(72) Inventor (*for all designated States except MG*):  
**SEVRAIN, Lionel, C.** [FR/US]; 5 Hildale Road,  
Plymouth, MA 02360 (US).

(88) Date of publication of the international search report:  
**8 August 2002**

[Continued on next page]

(54) Title: **ANCHORING SYSTEM FOR FIXING OBJECTS TO BONES**

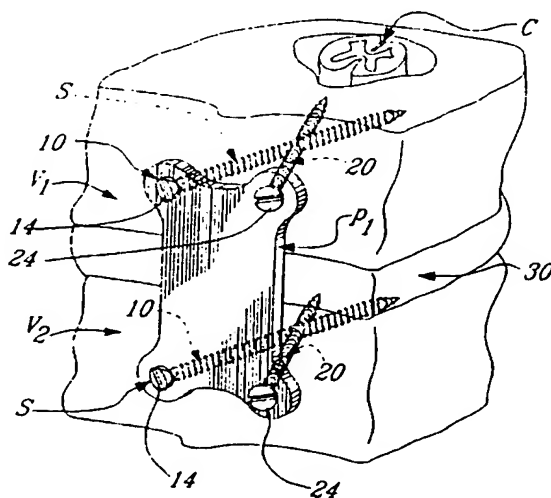

(57) Abstract: An anchoring system (S) for mounting a support plate (P, P') for instance to a human rachis comprises first and second threaded fasteners (10, 20) each having proximal and distal ends. The proximal ends are adapted to be spaced from each other for holding the support plate (P, P') against a vertebra (V, V<sub>1</sub>, V<sub>2</sub>) of the rachis while the distal ends are embedded in the bone. The threaded fasteners (10, 20) converge from their proximal ends towards their distal ends. The first threaded fastener (10) defines at its distal end a female threaded element in the form of a threaded opening (12) extending obliquely means of the first fastener (10) and adapted to be threadably engaged by the male threaded distal end of the second fastener (20). The proximal end of the first fastener (10) is provided with indicia for indicating an orientation of its threaded opening (12) within the bone (V, V<sub>1</sub>, V<sub>2</sub>) such as to facilitate the engagement therein of the male threaded distal end of the second fastener (20). With the support plate (P, P'), the first and second fasteners (10, 20) define a triangular frame that is firmly secure to the vertebra (V, V<sub>1</sub>, V<sub>2</sub>).

WO 01/089400 A3





*For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*

## INTERNATIONAL SEARCH REPORT

International Application No

PCT/CA 01/00751

A. CLASSIFICATION OF SUBJECT MATTER  
IPC 7 A61B17/70 A61B17/86

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)  
IPC 7 A61B

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)  
EPO-Internal

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 5 800 433 A (SMITH AARON C ET AL) 1 September 1998 (1998-09-01) abstract; figure 2 ---	1, 16
A	US 5 603 713 A (AUST GILBERT M ET AL) 18 February 1997 (1997-02-18) the whole document ---	1, 16
A	US 5 480 402 A (KIM ANDREW C) 2 January 1996 (1996-01-02) column 2, line 37 - line 52; figure 1 ---	1, 16
A	US 5 514 137 A (COUTTS RICHARD D) 7 May 1996 (1996-05-07) figure 1 -----	1, 16

☐ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

## \* Special categories of cited documents:

- \*A\* document defining the general state of the art which is not considered to be of particular relevance
- \*E\* earlier document but published on or after the international filing date
- \*L\* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- \*O\* document referring to an oral disclosure, use, exhibition or other means
- \*P\* document published prior to the international filing date but later than the priority date claimed

- \*T\* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- \*X\* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- \*Y\* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- \*&\* document member of the same patent family

Date of the actual completion of the international search

15 March 2002

Date of mailing of the international search report

27/03/2002

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2  
NL - 2280 HV Rijswijk  
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,  
Fax: (+31-70) 340-3016

Authorized officer

Ducrau, F

# INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/CA 01/00751

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
US 5800433	A	01-09-1998	AU 695138 B2	06-08-1998
			AU 1915197 A	04-12-1997
			CA 2203716 A1	30-11-1997
			CN 1169848 A	14-01-1998
			EP 0809971 A2	03-12-1997
			JP 10043200 A	17-02-1998
			KR 212354 B1	02-08-1999
			US 6214005 B1	10-04-2001
US 5603713	A	18-02-1997	US 5180381 A	19-01-1993
US 5480402	A	02-01-1996	NONE	
US 5514137	A	07-05-1996	CA 2178507 A1	15-06-1995
			EP 0732900 A1	25-09-1996
			JP 9506021 T	17-06-1997
			WO 9515732 A1	15-06-1995